WB-RDW Metal Access Door Recessed for Drywall Surfaces






DETAIL & SUBMITTAL SHEET


Project:

Specification Reference:

Contractor:

Architect: Date:



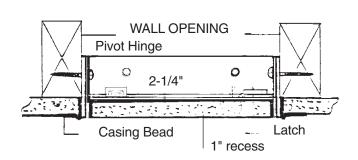

SECTION DETAIL

A B

CONSTRUCTION FEATURES:

Door: 14 ga. steel. Door is recessed 1" to accept drywall.

Box Return Frame: 16 ga. steel. These models have a 1" wide perforated flange of 24 ga. Satin Coated galvanized steel for mounting purposes.

Hinge: Fully concealed pivot type hinge can be opened to 110°; will be placed on long side of door unless otherwise requested.

Latches: Flush, stainless steel cam operated with screwdriver. Latches are positioned opposite hinge as well as top and bottom on larger sizes.

Finish: Electrostatically applied baked grey enamel over rust-inhibiting, phosphate treated steel.

Optional Finish: (AT EXTRA COST)

• Stainless Steel Type 304 or 316
Options: (AT EXTRA COST)

• Key-operated medium barrel cylinder lock (key code 151)

Each door comes complete with grommets.



Door Wall Cam Shipping Hinges Wt. (Lbs.) Size Opening Latch 121/4"x121/4" 12"x12" 6 12"x24" 2 121/4"x241/4" 13 16"x16" 161/4"x161/4" 3 12 18"x18" 181/4"x181/4" 1 3 13 24"x24" 241/4"x241/4" 4 21 24"x36" 241/4"x361/4" 32 5

Corporate Office: 777 Tapscott Rd. Scarborough, Ontario M1X 1A2 Phone: (416) 299-7767 Fax: (416) 299-8039 Toll free tel.: 1-888-575-1132 Toll free fax: 1-888-575-1134

www.williams-brothers.com sales@williams-brothers.com