



**Precision Plumbing Products**

*"Specify with Confidence - Install with Pride"*

## PRIME-TIME ELECTRONIC TRAP PRIMING ASSEMBLY SURFACE MOUNT

www.pppinc.net

It's PRIME-TIME to meet your floor drain trap priming needs. This unique trap priming assembly is available in 4 to 30 opening configurations and all the contractor needs to do is simply supply the potable water and power, Precision supplies the rest...

"... Automatically maintains  
**a constant water seal in floor**  
drain traps."

### Features:

ATMOSPHERIC VACUUM BREAKER  
PRE-SET 24 HOUR CLOCK  
MANUAL OVER RIDE SWITCH/TEST BUTTON  
120v/220v SOLENOID VALVE  
120v/220v 3/WIRE CONNECTION  
3/4" FNPT CONNECTION  
CALIBRATED MANIFOLD FOR EQUAL  
WATER DISTRIBUTION  
5/8" OR 1/2" OUTLET COMPRESSION FITTINGS

### PART NUMBERS:

PTS-4, PTS-6, PTS-8, PTS-10, PTS-12  
PTS-1320, PTS-2130.

PTS-4 4 OPENING MANIFOLD  
- THRU -  
PTS-2130 30 OPENING MANIFOLD



SURFACE MOUNT CABINET

The PRIME-TIME PRIMING ASSEMBLY will supply a minimum of 2 oz. of potable water at 20 P.S.I.G. at a preset factory setting of 10 seconds. The entire unit is pre-assembled in a steel cabinet ready to be either surface or flush wall mounted. The Priming assembly must be mounted above the finished floor.


NOTE: All PRIME-TIME Flush Mount Units are available in Fire Rated Cabinets 6" in Depth.

PATENT NO. 5,253,670



SURFACE MOUNT CABINET

METAL CABINET:  
 12" x 12" x 4" NEMA-1 with cover plate.  
 INLET:  
 3/4" inch NPT female. ANSI/ASME BI.20.1.  
 OUTLET:  
 5/8" or 1/2" inch compression fitting. SAEJ512.  
 MANIFOLD:  
 3/4" Type "L" copper tubing. ASTM B88.  
 SOLDERED JOINTS:  
 95-5 lead free containing lead not in excess of 0.2%.  
 ELECTRICAL COMPONENTS:  
 Circuit Breaker, Manual Over Ride Switch/Test Button, Timer, Solenoid Valve marked as UL listed.  
 BACKFLOW PREVENTION:  
 Anti-Siphon atmospheric vacuum breaker meets Los Angeles code, IAPMO, New York Board of Standards, ASSE 1001 and CSA.

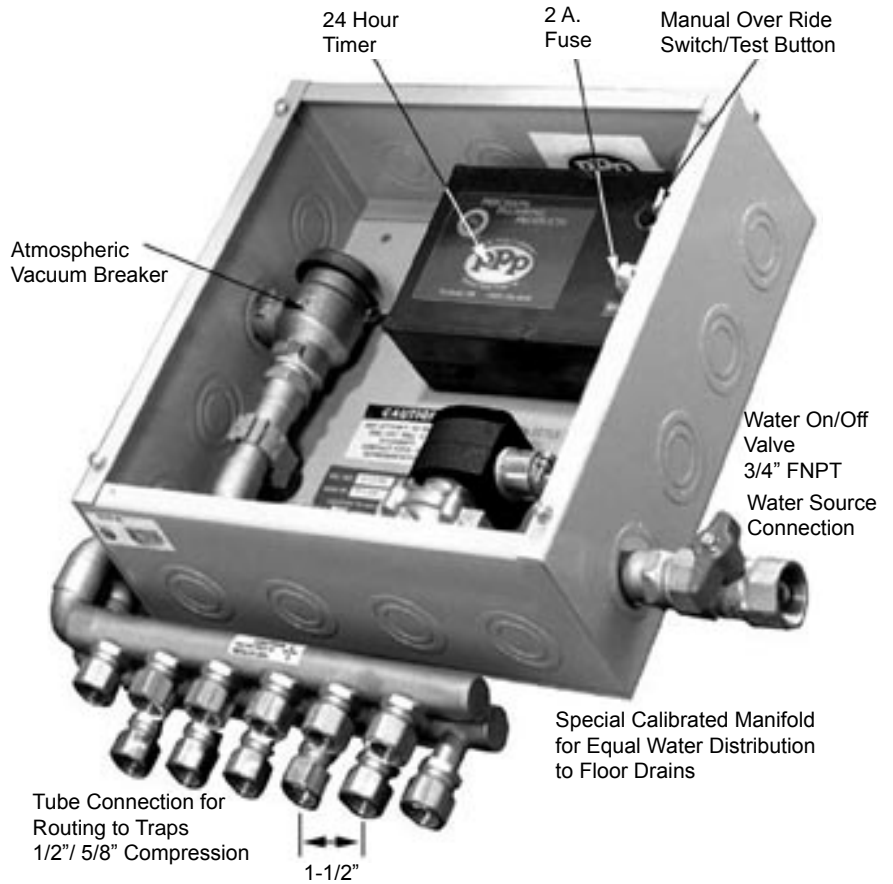

MODEL # PTS- \_\_\_\_\_  
 PTS-1320 - # of Drains Served: \_\_\_\_\_  
 PTS-2130 - # of Drains Served: \_\_\_\_\_

Mounting Anchors Included.

PLEASE NOTE:  
 UNIT MUST BE INSTALLED PLUMB.  
 MUST BE INSTALLED WITH ACCESS.

PROJECT SUBMITTAL

Project: \_\_\_\_\_  
 Contractor: \_\_\_\_\_  
 Engineer: \_\_\_\_\_  
 Date Submitted: \_\_\_\_\_  
 Prepared By: \_\_\_\_\_

COMPRESSION FITTINGS:		(CHECK ONLY ONE)
<input type="checkbox"/>	1/2" COMP. FOR 3/8" ID COPPER LINE	
<input type="checkbox"/>	5/8" COMP. FOR 1/2" ID COPPER LINE (This line is the floor drain trap make-up water line.)	



Precision Plumbing Products  
 Division of JL Industries, Inc.

Airport Business Center  
 6807 NE 79th Court, Suite E  
 Portland, Oregon 97218

T (503) 256-4010  
 F (503) 253-8165

www.pppinc.net