




Precision Plumbing Products

"Specify with Confidence - Install with Pride"

MINI-PRIME ELECTRONIC TRAP PRIMING MANIFOLD

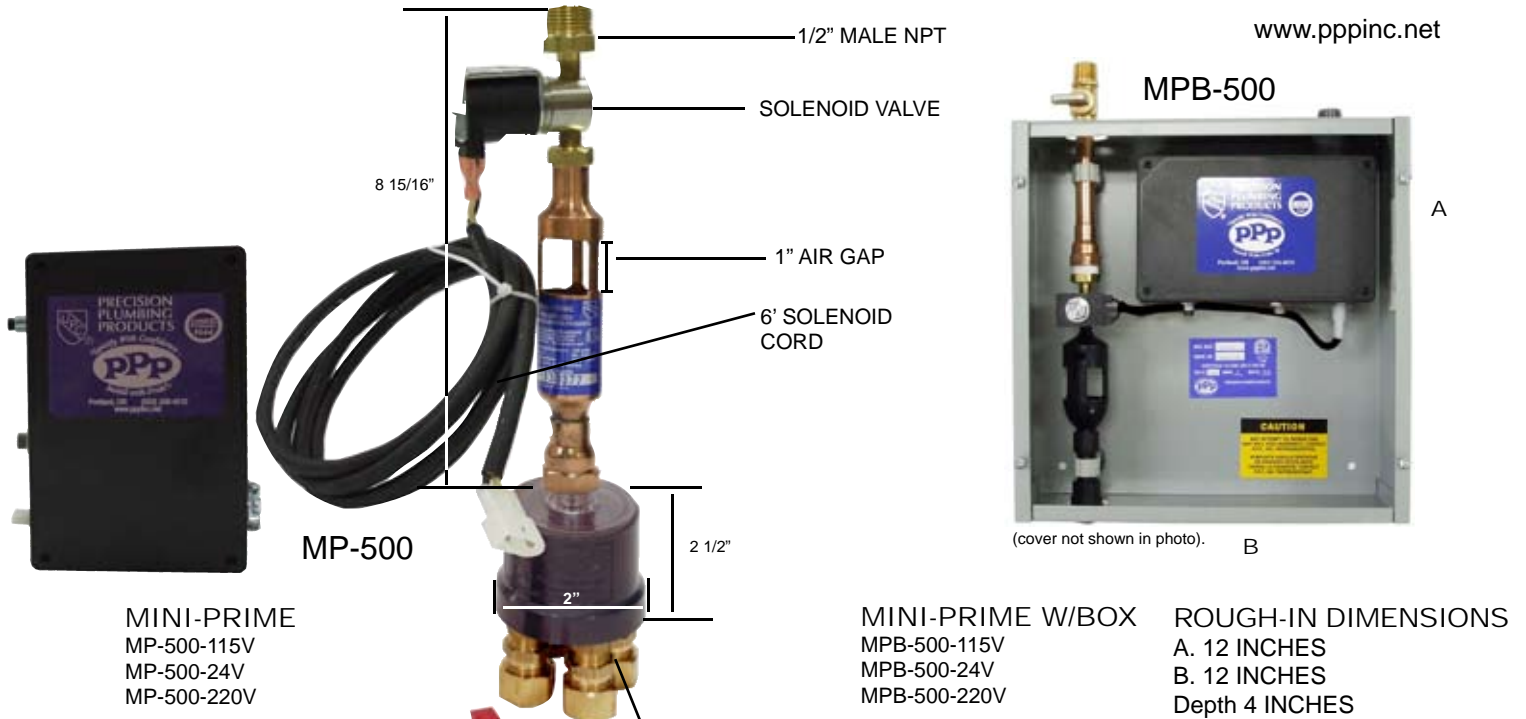

PLEASE NOTE:
DESIGNED FOR USE WITH 1 TO 4 FLOOR DRAINS.
DISTRIBUTION UNITS PURCHASED SEPARATELY.
THE PRIMING VALVE MUST HAVE A MINIMUM ELEVATION
OF 12 INCHES (305MM) ABOVE THE FINISHED FLOOR.

PROJECT SUBMITTAL MODEL # _____

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____

RECYCLE TIMER BOX:

Dimensions - (L) 7 5/8"x (W) 4 5/8"x (D) 2 3/8"

INLET:

1/2"NPT Male. ANSI/ASME B1.20.1.

OUTLET:

1/2"NPT Female. ANSI/ASME B1.20.1

DISTRIBUTION UNITS:

(DU Series) Drain Outlet: 5/8" and 1/2" Compression Fittings SAEJ512
-1/2" female NPT ANSI/ASME B1.20.1.

SOLDER JOINTS:

95-5 lead free. Containing lead not in the excess of 0.2%.

ELECTRICAL COMPONENTS:

Circuit Breaker, Switch, Timer Solenoid Valve UL Listed. Electrical assembly listed per UL #;73.

TEMPERATURE/PRESSURE:

32°F-125°, 20 PSI-150 PSI. Minimum 2oz. water at 20 PSI per drain served.

ACCESS DOOR FOR MP-500 Model:

D-814PC, D-814SS, F-814PC, F--814SS.

US PATENT NUMBER 5,797,419 CANADIAN PATENT NUMBER 2,174,578

Precision Plumbing Products

Division of JL Industries, Inc.
Airport Business Center
6807 NE 79th Court, Suite E
Portland, Oregon 97218
T (503) 256-4010
F (503) 253-8165
www.pppinc.net

