



Precision Plumbing Products

"Specify with Confidence - Install with Pride"

NEW PRODUCT


PRIME-PRO™ FLOOR DRAIN TRAP PRIMER

The Prime-Pro™ is activated when sensing potable water flowing at an adjacent plumbing fixture. This trap priming device must be installed on the cold water line leading to the plumbing fixture; the valve then emits fresh cold potable water to a floor drain trap as long as the fixture is in use, providing adequate trap seal. Providing potable water to the trap seal is essential in preventing sewer gas escape and bacteria growth.

The Prime-Pro™ trap primer is equipped with vacuum breaker ports and internal back-flow protection to prevent cross connection. The valve is factory pre-set and 100% function tested prior to being labeled and boxed.

The Prime-Pro™ trap priming valve is designed for multiple floor drain trap seal applications. The valve is activated at a minimum flow rate of 0.5 GPM at 20 PSIG.

This product has been third party tested and meets the requirements of ASSE Standard 1018.

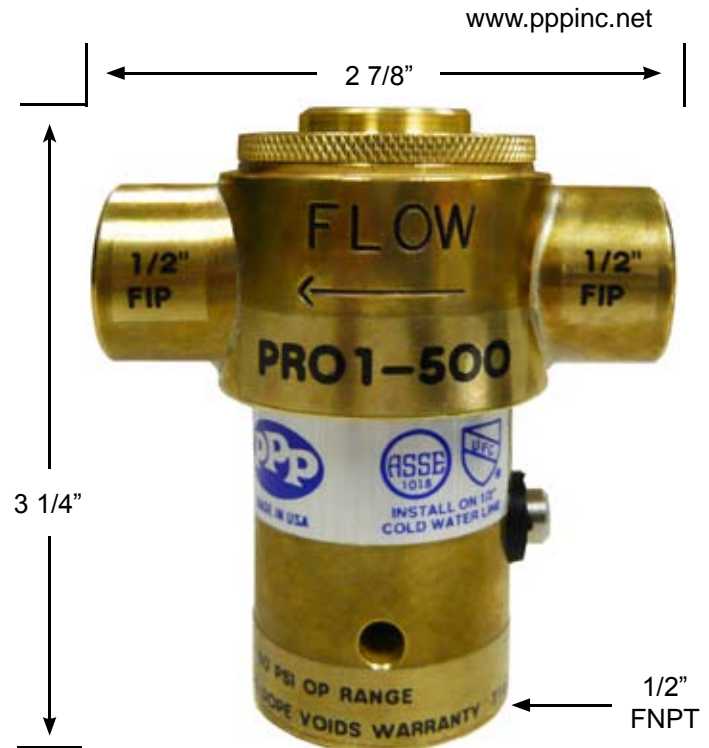

PART NO: PRO1-500

Prime-Pro™ Discharge Info:

Minimum discharge rate when flow is activated for 5 seconds at 20 PSI is 0.845 oz.

Minimum discharge rate when flow is activated for 5 seconds at 80 PSI is 1.65 oz.



Precision Plumbing Products
Division of JL industries, inc.

Airport Business Center
6807 NE 79th Court, Suite E
Portland, Oregon 97218

T (503) 256-4010

F (503) 253-8165

www.pppinc.net

PATENT NO. 4,497,337

JL industries, inc.



Complies with low lead law



Made in the U.S.A.
We do not export jobs.

