




Precision Plumbing Products

"Specify with Confidence - Install with Pride"

LEAD FREE

PRIME-PRO™ INSTALLATION/SUBMITTAL

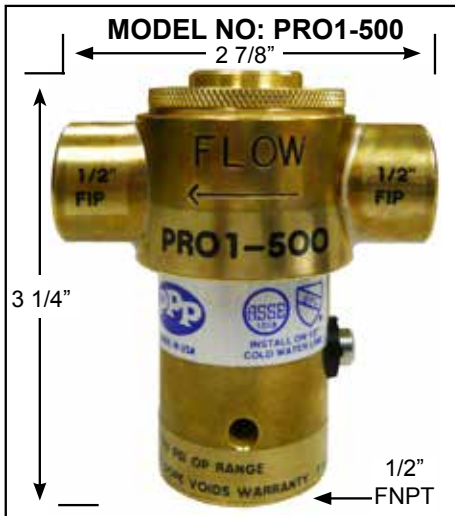

INSTALLATION INSTRUCTIONS PRO1-500 FLOOR DRAIN TRAP PRIMER

- 1) Flush supply line prior to installation.
- 2) Use ribbon pipe seal tape - **ONLY**. Install valve plumb, observing the flow direction marked on the valve. **Do not over tighten.**
- 3) The valve is recommended to be installed a minimum of 12" (305mm) above the finished floor, before a 90° elbow can be installed.
- 4) Do not install the valve where line pressures exceed 80 PSIG. This valve should never be installed on a hot water line. Install on a cold fresh water line **ONLY**.
- 5) Effective operating range 20 to 80 PSIG (138 to 552kpa).
- 6) Failure to follow these instructions will make the product warranty null and void.
- 7) The valve must not be installed on a bypass.
- 8) Manufacturer recommends that the make-up water line to the P-trap must have a continuous slope. (Consult local code requirements.)
- 9) Furthest recommended distance of makeup line is 20' of horizontal line to the floor drain.
- 10) Minimum .5 gpm flow rate required.

Meets requirements of AB 1953.

FLOOR DRAIN TRAP PRIMER DIST. CHART

# of Drains	Supply Tube	Dist. Units
1	N/A	N/A
2	N/A	DU-4/DU-U
3	N/A	DU-4/DU-U
4	N/A	DU-4/DU-U
Max. Water delivery based upon pressure drop and fixture unit activity on the system.		
Primer Model: CPO-500 DUAL FLOW		

PROJECT SUBMITTAL

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____


Prepared By: _____

Prime-Pro™ Discharge Info:

Minimum discharge rate when flow is activated for 5 seconds at 20 PSI is 0.845 oz.

Minimum discharge rate when flow is activated for 5 seconds at 80 PSI is 1.65 oz.

Minimum in-line flow through the valve is .5gpm. Maximum 7 gpm.

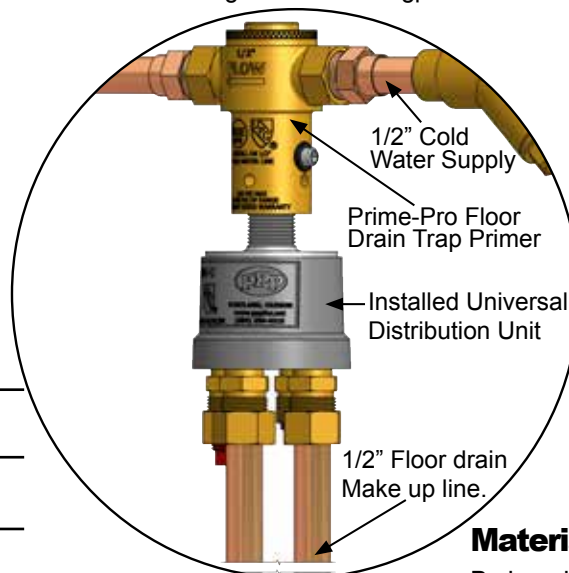

Materials of Construction:

Body and Cap: C68020 lead-free Brass
Check Valve: Neoperl
O-Rings: Nitrile
Screen: Stainless Steel

US PATENT # 8,671,970

CANADIAN PATENT # 2 762 879



Precision Plumbing Products

Division of JL industries, inc.
802 SE 199th Avenue
Portland, Oregon 97233

T (503) 256-4010
F (503) 253-8165
www.pppinc.net

