



THE WILLIAMS
BROTHERS
CORPORATION

WB-AL ALUMINUM INSULATED ACCESS DOOR

The WB-AL is a light weight insulated aluminum access door. It is ideal for exterior applications, and also those specific interior applications where corrosion or moisture is a concern. The aluminum panel is insulated with 1" *SilveRboard Ridge Foam Insulation*. Access to large openings in walls and ceilings is made easy. The non-extruded door frame has the same visual aesthetic design as the UAD door. Neoprene gasketing is installed on 4 sides.

FEATURES

Door and Trim	.063 Aluminum. Trim 1 1/2" wide
Return Frame	.063 Aluminum. Depth of 2"
Hinge	Continuous rod hinge
Latches	Flush aluminum steel cam
Insulation	1" AMVIC <i>SilveRboard Ridge Foam Insulation</i> with a R5 Value
Gasket	Neoprene gasket included on 4 sides
Finish	Mill finish
Options (at extra cost)	Key medium barrel cylinder lock with key (code 151)


Model No.	A x B Door Size	Cam Latch	Shipping Weight (Lbs) Steel/Stainless
WB-AL 8x8	8" x 8"	1	3.5
WB-AL 12x12	12" x 12"	3	6
WB-AL 16x16	16" x 16"	3	9
WB-AL 18x18	18" x 18"	3	15
WB-AL 24x24	24" x 24"	4	24
WB-AL 24x36	24" x 36"	5	45

Rough wall opening = door size + 1/4"




WB-AL

DIMENSIONS

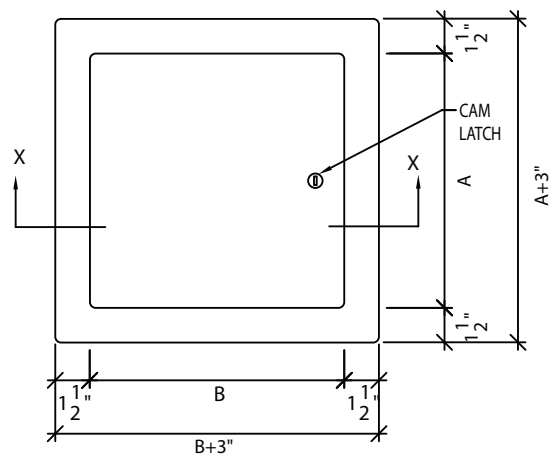

Elevation

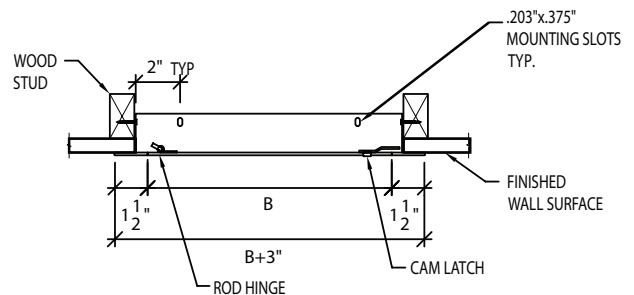

Section Detail