



Precision Plumbing Products

"Specify with Confidence - Install with Pride"

PRIME-TIME ENERGY MANAGEMENT SYSTEM FLUSH MOUNT

www.pppinc.net

It's PRIME-TIME to meet your floor drain trap priming needs. This unique trap priming assembly uses your EMS to maintain a constant water seal in floor drain traps and is available in 4 through 30 opening configurations and all the contractor needs to do is simply supply the potable water and connect to EMS, Precision supplies the rest...

FEATURES:

- ATMOSPHERIC VACUUM BREAKER
- ENERGY MANAGEMENT READY
- MANUAL OVER RIDE SWITCH
- 24V SOLENOID
- 3/4" FNPT CONNECTION
- CALIBRATED MANIFOLD FOR EQUAL WATER DISTRIBUTION
- OUTLET FITTING OPTIONS: 5/8" OR 1/2" COMPRESSION, 1/2" PROPEX and PEX FITTINGS
- FOUR OPENING MANIFOLD TO THIRTY OPENING MANIFOLD

FLUSH MOUNT CABINETS

The Electronic Priming Assembly pictured is available in five separate configurations. The model PT-4-EMS-24V offers a four opening manifold capable of priming four separate floor drain traps from a single control unit. Models PT-6-EMS-24V thru PT-12-EMS-24V provide the same features only expanding to a total of twelve floor drains. All manifolds are available in either 1/2" or 5/8" compression, and 1/2" PEX fittings.

Part Number:

PT-4-EMS-24V, PT-6-EMS-24V, PT-8-EMS-24V,

PT-10-EMS-24V,

PT-12-EMS-24V

Cabinet Dimension:

ID 14" W x 16" H x



The Electronic Priming Assembly pictured is available in a single configuration but is capable of priming from thirteen to twenty separate floor drain traps from a single control unit. The manifold is available in either 1/2" or 5/8" compression and 1/2" PEX fittings. This model serves 13 to 20 drains.

Part Number:

PT-16-EMS-24V

PT-20-EMS-24V

Cabinet Dimension:

ID 20-1/2" W x 16-1/2"

H x 3-3/8" D



The Electronic Priming Assembly pictured is available in a single configuration but is capable of priming from twenty one to thirty separate floor drain traps from a single control unit. The manifold is available in either 1/2" or 5/8" compression and 1/2" PEX fittings. This model serves 21 to 30 drains.

Part Number:

PT-24-EMS-24V

PT-30-EMS-24V

Cabinet Dimension:

ID 30-1/2" W x 20-1/2" H

x 3-3/8" D



The EMS 24 Volt will supply potable water through your Energy Management System. The entire unit is pre-assembled in a steel cabinet ready to be mounted.

SPECIFICATIONS

MODEL # PT- _____ EMS24V

PT-16 EMS-24V # of drains served: _____


PT-20 EMS-24V # of drains served: _____

PT-24 EMS-24V # of drains served: _____

PT-30 EMS-24V # of drains served: _____

(Please refer to list on the right for dimensions of cabinet models). Unit must be installed plumb and must be installed with access. The priming valve make upline to floor drain is recommended to be a minimum 12" (305mm) off the finished floor before a 90° elbow can be installed.

COMPRESSION FITTINGS: (CHECK ONLY ONE)	
<input type="checkbox"/>	1/2" Comp. for 3/8" ID Copper Line
<input type="checkbox"/>	5/8" Comp. for 1/2" ID Copper Line. This line is the floor drain trap make-up water line.
<input type="checkbox"/>	1/2" PEX
<input type="checkbox"/>	1/2" ProPEX Uponor
CABINET: 16 Gauge Steel	
<input type="checkbox"/>	Dry Wall, Flush Mount (In Wall) Cabinet Depth 4", Mounting Anchor Provided
<input type="checkbox"/>	Fire Rated, Flush Mount (In Wall) Cabinet Depth 6", Mounting Anchors Provided
ACCESS DOOR: Dry Wall	
<input type="checkbox"/>	Prime Coat
<input type="checkbox"/>	Stainless Steel
ACCESS DOOR LATCH:	
<input type="checkbox"/>	Screw Driver - Standard
<input type="checkbox"/>	Allen Key
<input type="checkbox"/>	Cylinder Lock
ACCESS DOOR: Fire Rated	
<input type="checkbox"/>	Prime Coat
<input type="checkbox"/>	Stainless Steel
ACCESS DOOR LATCH:	
<input type="checkbox"/>	Ring Pull - Standard
<input type="checkbox"/>	Cylinder Lock
VOLTAGE:	
<input type="checkbox"/>	24 V For Energy Management System

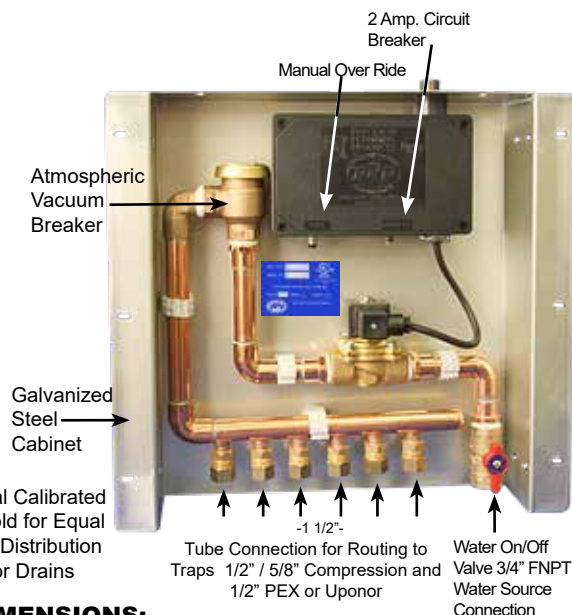

CABINET DIMENSIONS:

MODEL # PT-4 EMS-24V - PT-12 EMS-24V ID Width 14" x Height 16"

MODEL # PT-16 EMS-24V ID Width 20 1/2" x Height 16 1/2" MODEL

PT-20 EMS-24V ID Width 20 1/2" x Height 16 1/2" MODEL # PT-24

EMS-24V ID Width 30 1/2" x Height 20 1/2" MODEL # PT-30

EMS-24V ID Width 30 1/2" x Height 20 1/2"

DEPTH OF CABINET:

Standard 3-3/8", Fire Rated 6"

INLET:

3/4" inch NPT female. ANSI/ASME B1.20.1.

OUTLET:

5/8" or 1/2" compression or 1/2" PEX or Uponor fitting. SAEJ512.

MANIFOLD:

3/4" Type "L" copper tubing. ASTM B88.

SOLDERED JOINTS:

95-5 lead free containing lead not in excess of 0.2%.

ELECTRICAL COMPONENTS:

Circuit Breaker, Test Switch, Timer, Solenoid Valve marked as UL listed.

Electronic assembly tested and certified per UL #73.

BACKFLOW PREVENTION:

Anti-Siphon atmospheric vacuum breaker meets Los Angeles code, IAPMO, New York Board of Standards, ASSE 1001 and CSA.

METAL CABINET:

16 gauge steel, galvanized.

ACCESS DOOR:

Optional: Prime Coat, Stainless Steel, and Fire Rated.

TEMPERATURE/PRESSURE:

32°F - 125°F, 20 PSI - 150 PSI.

NOTE: UNIT MUST BE INSTALLED PLUMB.

- MUST BE INSTALLED WITH ACCESS.

- All PRIME-TIME FLUSH MOUNT UNITS ARE AVAILABLE IN FIRE RATED CABINETS - 6" IN DEPTH.

PROJECT SUBMITTAL

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____

Precision Plumbing Products

Division of JL Industries, Inc.

802 SE 199th Ave.
Portland, Oregon 97233

T (503) 256-4010

F (503) 253-8165

www.pppinc.net



PATENT NO. 5,253,670

Rev 07/17