



**THE WILLIAMS
BROTHERS
CORPORATION**

WB-FR BASIC UNINSULATED FIRE RATED ACCESS DOOR

The WB-FR Basic Fire Rated Access Door is designed for wall application only. It is not insulated and should only be installed in environments where temperature rise is not a concern. It features a 1 1/2" trim for an easy flush application into various wall finishes.

FEATURES

Door and Trim	14 ga. cold rolled steel
Box Return Frame	16 ga. cold rolled steel, 2 1/2" deep frame
Hinge	180° full length piano hinge
Latch	Self latching lock with key and knurled knob
Automatic Door Closer	Standard on all doors
Inside Release Latch	Standard on all doors
Finish	White powder coat paintable finish
Options (at extra cost)	<ul style="list-style-type: none"> Mortise lock preparation Stainless steel #304 and #316 (#4 satin finish) Masonry anchor straps Custom sizes available

Note: WB-FR BASIC access doors are for vertical applications only as code allows and no temperature rise is required.


Model No.	A x B Door Size	Slam Latch	Shipping Weight (Lbs) Steel/Stainless
WB-FRB 8x8	8" x 8"	1	6
WB-FRB 10x10	10" x 10"	1	9
WB-FRB 12x12	12" x 12"	1	11
WB-FRB 14x14	14" x 14"	1	14
WB-FRB 16x16	16" x 16"	1	17
WB-FRB 18x18	18" x 18"	1	21
WB-FRB 20x20	20" x 20"	1	24
WB-FRB 22x22	22" x 22"	1	28
WB-FRB 22x30	22" x 30"	2	29
WB-FRB 22x36	22" x 36"	2	30
WB-FRB 24x24	24" x 24"	1	26
WB-FRB 24x30	24" x 30"	2	43
WB-FRB 24x36	24" x 36"	2	38
WB-FRB 30x30	30" x 30"	2	50
WB-FRB 36x36	36" x 36"	2	60

Rough wall opening = door size + 1/4"




WB-FR B

DIMENSIONS

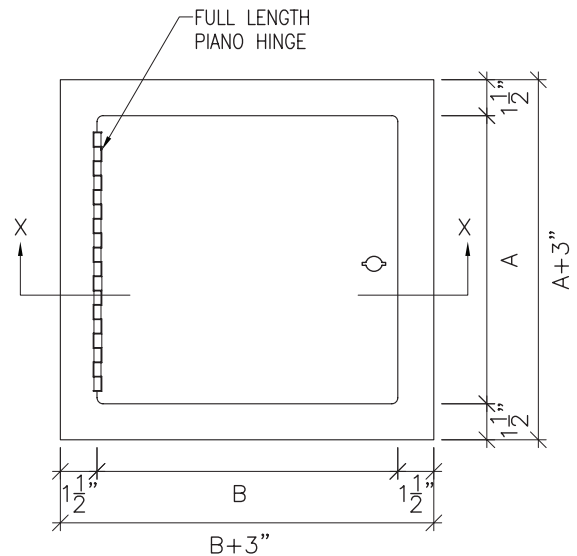

Elevation

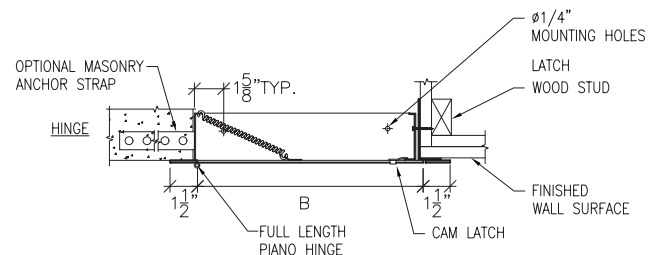

Section Detail